


EPISTAR **TRIDONIC**

LITE PRO 150 LED SERIES 1500mm 69W
CODE: 651569MZ50



Electrical Specification

Size	Light source	Driver	Voltage	Power	CCT	IP level	lumens	CRI
1500mm	SMD 5730 EPISTAR	TRIDONIC	220V-240V	69W	5000k	IP65	8980lm	CRI>80
Diffuser	Angel	Tc=C°	Certificates	Application	PF	Directive	Life span	Warranty
OPAL	120°	-20/+45	ROHS/CE	INDOOR/ OUTDOOR	PF>0.95	LVD	50 000h	5 years


 METAL SHEET • DKP Metal Sheet • White Paint • 0,40 mm Thickness	 CABLE GLAND • Raw material : Polyamide • Protection class: IP 65 • Heat Resistance : - 30 °C + 80 °C	 CEILING CARRIER • Stainless Steel • Easy and practical installation with biasing Feature • 0,60 mm Thickness
 MANDAL • Stainless Steel • Easy and practical installation with biasing Feature • 0,50 mm Thickness	 DRIVER • Suitable for CE and ROHS Criterias • High Efficiency >%90 • Harmonic Filter • Lasts for 50.000 Hr	 CABLE • 0,80mm Thickness • Electrolytic Solid Copper • TI/PVC Isolation

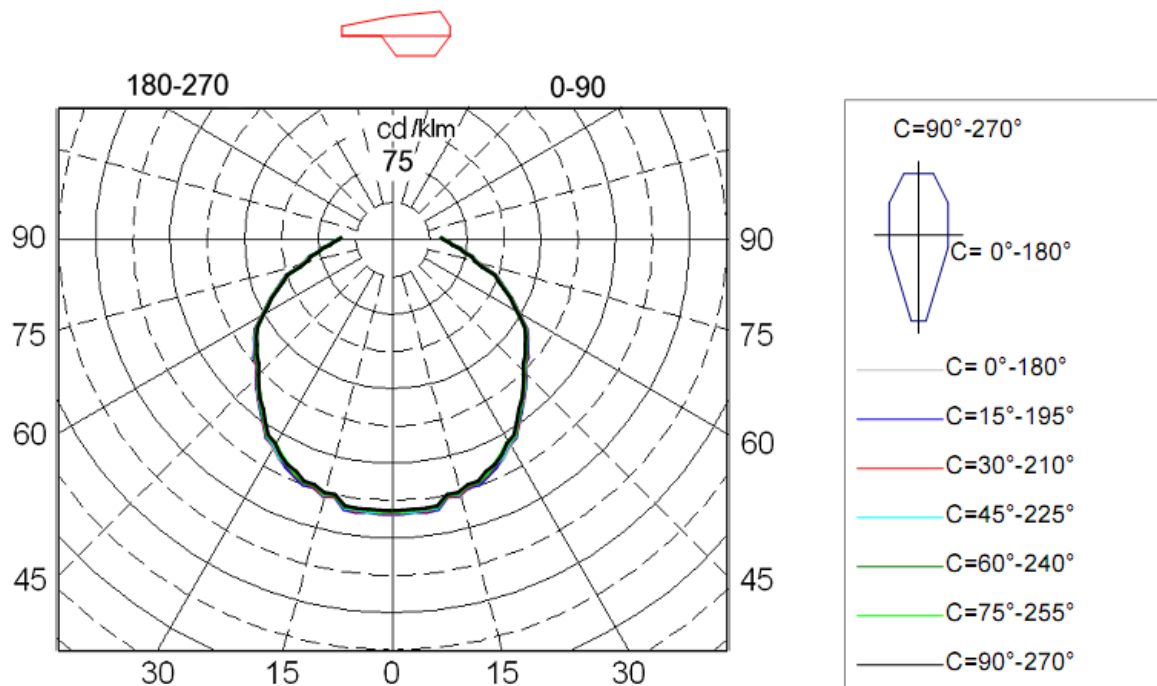


Luminaire light distribution of polar coordinates in the conditional flux 1000lm

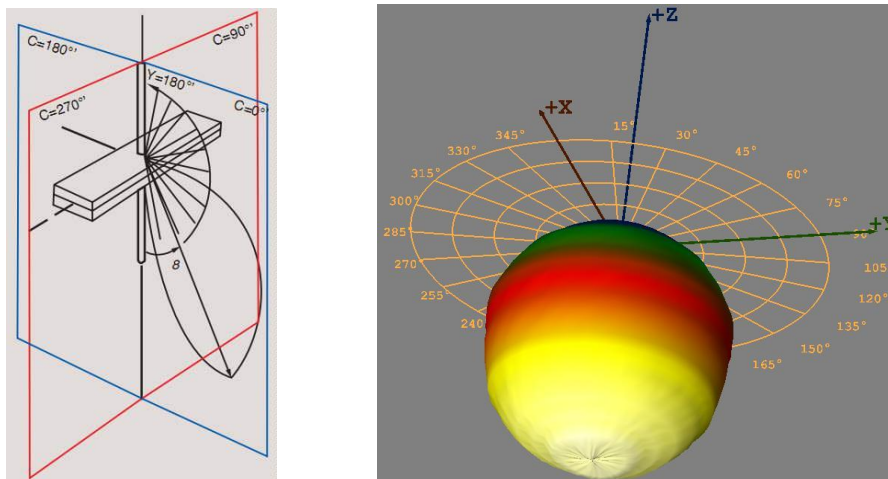

Luminaire light distribution of the 3D

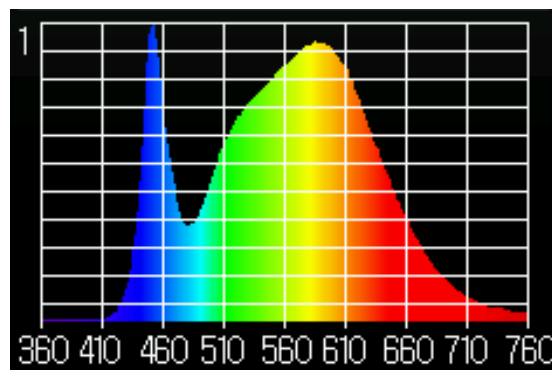

Spectrum of light

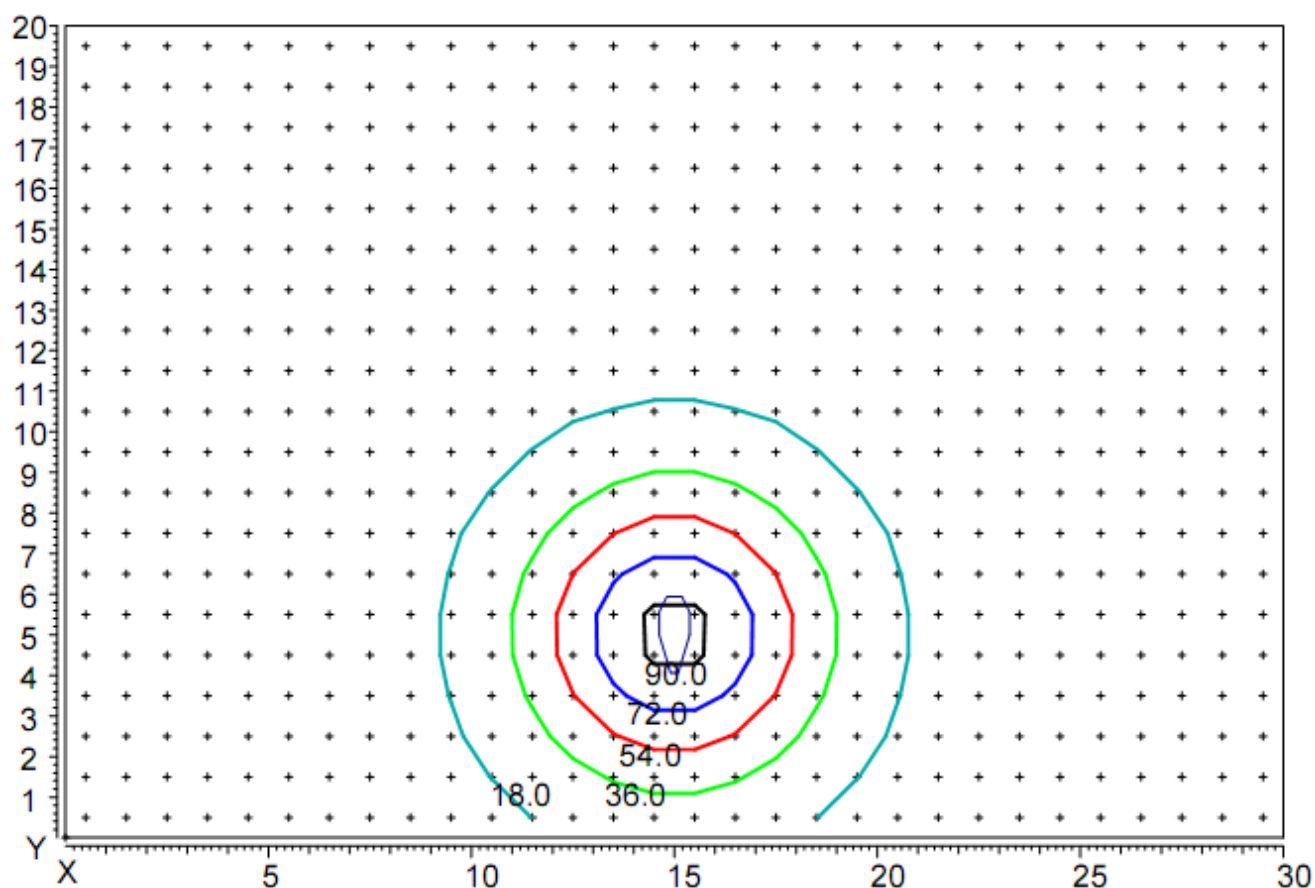

Distribution of illumination in height hanging lamp 5 m

Coordinates of the luminaire X=15m, Y=5m.